


Specifications

BBL-55 Auto Balance

External Audio Inputs	L and R
Input Level Control	Input Audio Signal
Audio Output	Auto Balance & SOUND ADJUST
Auto Balance Output Level	4 steps (500mV, 800mV, 1V, 1.5V)
SOUND EFFECT	4 steps (BYPASS, LOW, MID, HIGH)
Power Switch	On / Off
Auto Balance LED Indication	LED: Red x 4
SOUND EFFECT LED Indication	LED: Green x 1, Red x 3
SOUND FREQUENCY ADJUST	Low Frequency Adjust (40Hz - 80Hz)
SOUND EFFECT BOOST ADJUST	Low Frequency Boost
Power Requirement	AC230V , 50Hz
Power Consumption	8 W
Dimension (W x H x D)	480mm x 51mm x 197mm
Weight	2.4Kg

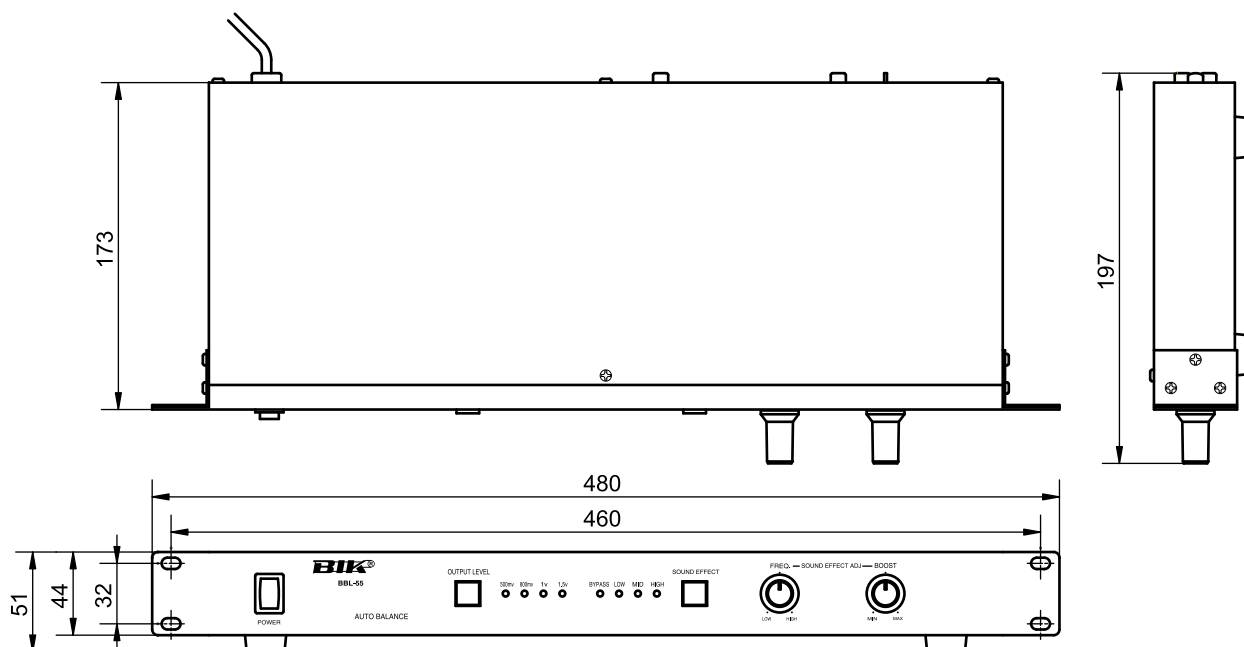

BIK CO.,LTD.

3-34 YANAKA-CHO, KOSHIGAYA-SHI,
SAITAMA-KEN 343-0856 JAPAN
TEL. +81-48-969-6533 FAX. +81-48-969-6556
URL. <http://www.bik-coltd.jp>
Email. best-sound@bik-coltd.jp